



ARRL Periodicals Archive – Search Results

A membership benefit of ARRL and the ARRL Technical Information Service

ARRL Members: You may print a copy for personal use. Any other use of the information requires permission (see Copyright/Reprint Notice below).

Need a higher quality reprint or scan? Some of the scans contained within the periodical archive were produced with older imaging technology. If you require a higher quality reprint or scan, please contact the ARRL Technical Information Service for assistance. Photocopies are \$3 for ARRL members, \$5 for nonmembers. For members, TIS can send the photocopies immediately and include an invoice. Nonmembers must prepay. Details are available at www.arrl.org/tis or email photocopy@arrl.org.

QST on CD-ROM: Annual CD-ROMs are available for recent publication years. For details and ordering information, visit www.arrl.org/qst.

Non-Members: Get access to the ARRL Periodicals Archive when you join ARRL today at www.arrl.org/join. For a complete list of membership benefits, visit www.arrl.org/benefits.

Copyright/Reprint Notice

In general, all ARRL content is copyrighted. ARRL articles, pages, or documents--printed and online--are not in the public domain. Therefore, they may not be freely distributed or copied. Additionally, no part of this document may be copied, sold to third parties, or otherwise commercially exploited without the explicit prior written consent of ARRL. You cannot post this document to a Web site or otherwise distribute it to others through any electronic medium.

For permission to quote or reprint material from ARRL, send a request including the issue date, a description of the material requested, and a description of where you intend to use the reprinted material to the ARRL Editorial & Production Department: permission@arrl.org.

QST Issue: Sep 1958

Title: Two-Band Halo for V.H.F. Mobile, A

Author: Edward P. Tilton, W1HDQ

[Click Here to Report a Problem with this File](#)



2010 ARRL Periodicals on CD-ROM

ARRL's popular journals are available on a compact, fully-searchable CD-ROM. Every word and photo published throughout 2010 is included!

- **QST** The official membership journal of ARRL
- **NCJ** National Contest Journal
- **QEX** Forum for Communications Experimenters

SEARCH the full text of every article by entering titles, call signs, names—almost any word. **SEE** every word, photo (including color images), drawing and table in technical and general-interest features, columns and product reviews, plus all advertisements. **PRINT** what you see, or copy it into other applications.

System Requirements: Microsoft Windows™ and Macintosh systems, using the industry standard Adobe® Acrobat® Reader® software. The Acrobat Reader is a free download at www.adobe.com.

2010 ARRL Periodicals on CD-ROM

ARRL Order No. 2001

Only \$24.95*

*plus shipping and handling


Additional sets available:

2009 Ed., ARRL Order No. 1486, \$24.95
 2008 Ed., ARRL Order No. 9406, \$24.95
 2007 Ed., ARRL Order No. 1204, \$19.95
 2006 Ed., ARRL Order No. 9841, \$19.95
 2005 Ed., ARRL Order No. 9574, \$19.95
 2004 Ed., ARRL Order No. 9396, \$19.95
 2003 Ed., ARRL Order No. 9124, \$19.95
 2002 Ed., ARRL Order No. 8802, \$19.95
 2001 Ed., ARRL Order No. 8632, \$19.95



ARRL The national association for AMATEUR RADIO™

SHOP DIRECT or call for a dealer near you.
 ONLINE WWW.ARRL.ORG/SHOP
 ORDER TOLL-FREE 888/277-5289 (US)

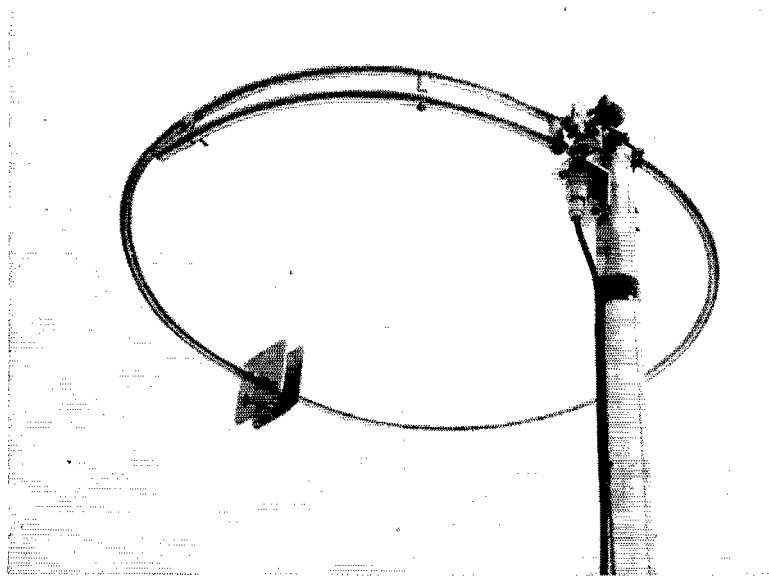

The 2-band halo as it appears when set up for 50-Mc. operation. Changing to 144 Mc. involves decreasing the plate spacing, by swapping cone insulators, and reseating the gamma matching clip and series capacitor.

A Two-Band Halo for V.H.F. Mobile

*50 and 144 Mc.
with a Single
Mobile Antenna System*

BY EDWARD P. TILTON,* WHDQ

HAVING thoroughly sold himself on the advantages of horizontal polarization for v.h.f. mobile work,¹ the writer spent many an odd moment pondering the possibility of working both 50 and 144 Mc. with a single antenna system. The need for a two-band antenna was intensified some months ago by a venture into the small sports-car field. There is no room in a car of this type for storing spare antennas!

The 50- and 144-Mc. bands are close to third-harmonic relationship. It should be possible, we reasoned, to work out a method whereby the antenna designed for 50 Mc. could be tunable to 48 Mc. as well, so that it could be made to work on its third harmonic. Tests with a conventional 50-Mc. halo showed that it was not too bad a 144-Mc. antenna, even before any attempt was made to tune it or match it properly. If these two matters could be handled, a halo of 50-Mc. dimensions should make a good radiator on 144

Mc.; probably better than one designed for the higher frequency.

Accordingly, we made up an experimental halo having provision for varying the spacing between the capacitor plates. With a little tinkering as to plate size, it was found that the antenna could be tuned down to 48 Mc. by the simple expedient of changing the spacing of the plates from $\frac{3}{4}$ to $\frac{5}{8}$ inch. This was a natural for two standard sizes of ceramic cone insulators. Next question: could the thing be matched on both bands without a major revision of the feed system?

It would be nice to be able to say that this problem was solved by dreaming up some matching combination that worked on both bands without changes, but such is not the case. Changing from 50 to 144 Mc. with the model shown involves three steps, but they can be handled in a matter of a minute's time. The changeover process may be less than ideal, but it is a big improvement over carrying two halos! Tests in comparison with a standard commercial halo on 50 Mc., and with various forms of dipoles and halos for 144, show that our two-band job acquits itself well on both bands.

Mechanical Details

The halo is made of $\frac{7}{16}$ -inch aluminum fuel-line tubing. This material was used because it is both strong and very light, and because we had a stock of it on hand. Any tubing of about $\frac{1}{2}$ -inch diameter could be used equally well. The loop is 67 inches in circumference. Again, this was a matter of what happened to be on hand; the coil of tubing lying under the bench happened to be just that big! The capacitor plates are $2\frac{1}{4}$ inches square, with the corners rounded off, mainly for the sake of appearance. The amount of rounding off gives a measure of adjustment, too. More on that later.

* V.H.F. Editor, QST.

¹ Tilton, "Polarization Effects in V.H.F. Mobile," QST, Dec., 1957, p. 11.

To fasten the capacitor plates to the ends of the tubing, aluminum rod stock was turned down to make a tight fit into the ends. This was tapped for 6-32 thread, and then forced into the tubing ends. Holes were drilled through tubing and inserts, at each end of the halo, and a screw run through each to keep the inserts from turning around or slipping out. The binding-head screws that hold the plates to the inserts are equipped with lock washers. The holes for mounting the ceramic cone spacer are drilled directly below the center, midway between the center and the edge of the capacitor plates.

The halo is set into a slot cut in the vertical support. This slot should be just big enough to permit the halo to be forced into it. The first model we made merely had a screw run through the halo and vertical support, but this turned out to be sloppy mechanically after a few hundred miles of driving. The halo had to be stiffened, so we cut it at the center and inserted about 2 inches of aluminum rod, again turned down on a lathe to fit tightly inside the tubing. The two pieces of tubing were then pushed together, over the insert, and drilled each side of center to pass 6-32 screws. The halo and insert were also drilled at the midpoint, to pass the mounting screw. This was an 8-32 screw, 1¼ inches long. If lathe facilities are not available, the mounting of the capacitor plates and the securing of the halo to the vertical support can be handled with angle brackets.

Mechanical stability is important. When we had the halo working satisfactorily with the car in a stationary position we found that the slight up-and-down movement experienced with the car in motion caused a flutter on received signals. There was no flutter observed on the transmitted signal, but a variation in feed impedance could be seen as a flickering of the Communicator green eye. This was cured by some extra stiffening at the point where the halo goes through the center support. Straps of aluminum ½ inch wide were wrapped around the halo either side of the mounting post. These were then bent at right angles and the ends pulled together with a bolt. This is none too fancy, but the halo has survived numerous encounters with low tree branches in several thousand miles of driving, and the flutter is gone.

The matching arm is 14½ inches long, of the same material as the halo itself. It is mounted below the halo on two ¾-inch cone standoffs. For convenience in detaching the feed line a coaxial fitting is mounted on an L bracket bolted to the vertical support. The stator bar of the 25-μuf. variable capacitor (Johnson 167-2) is soldered directly to the coaxial fitting. The rotor of the capacitor is connected to the gamma arm through a piece of stiff wire. To add further stiffening an aluminum angle bracket is screwed to the lower mounting stud of the capacitor and the other end mounted under the screw that holds the first cone standoff in place. Contact between the arm and the halo proper is made through a strap of ½-inch wide aluminum bent to form a sliding

clip. Be sure that a clean tight contact is made between the tubing and the clip, as high current flows at this point. A poor or varying contact will ruin the effectiveness of the antenna.

Adjustment

Probably many users do not realize it, but the capacity-loaded halo is a high-*Q* device. It must be tuned on-the-nose, or it will not work properly. The only reliable method for adjusting a halo is to use a standing-wave bridge, making tuning and matching adjustments for minimum reflected power. Using a field-strength meter and attempting to adjust for maximum radiated power can give confusing indications, and is almost certain to result in something less than maximum effectiveness.

The adjustment process with this design can be simplified if the halo is resonated approximately to the desired frequency ranges with the aid of a grid-dip meter. Set the clip at about one inch in from the end of the arm, and the series capacitor at the middle of its range. Check the resonant frequency of the loop with the grid-dip meter, with the ¾-inch spacer between the capacitor plates. It should be close to 50 Mc. Some variation can be obtained by trimming the corners of the plates, or by putting shims under the ceramic spacer. Both methods apply only for raising the frequency, of course. If the frequency is too high already, make new and slightly larger capacitor plates. Don't worry too much about this until an attempt has been made to match the antenna, however. Adjustments on the gamma arm and series capacitor may alter the resonant frequency somewhat.

Now insert an s.w.r. bridge between the antenna and the transmission line. Apply power and swing the capacitor through its range, noting whether there is a dip in reflected power at any point. There will be some detuning effect from the hands or a metal tool. This was taken care of by sawing a slot in the bakelite knob on the capacitor shaft, and then using an insulated screwdriver to turn the knob. If the reflected power will not drop to zero, slide the clip along the gamma arm and retune the capacitor, until the lowest reading possible is obtained. If this is still not zero, the halo is not resonant. If the halo capacitance is on the low side, moving the hands near the plates will cause the reflected power to drop. Closer spacing of the plates, larger plates or a longer halo loop are possible solutions.


These adjustments should be made on a frequency near the middle of the range you expect to use. Adjusting for optimum at 50.25 Mc., for example, will result in usable operation over the first 500 kc. of the band, and a good match (below 1.5 to 1) from 50.1 to 50.4. The s.w.r. will rise rapidly either side of this range.

To tune up on 144 Mc., insert the ¾-inch cone between the capacitor plates. Slide the clip back on the gamma arm about 3 to 4 inches and repeat the adjustment for minimum reflected power, using a frequency at the middle of a 2-Mc. range.

(Continued on page 140)

new fiberglass roof-top antenna . . . over 2.8 db measured gain!

Only 19"
above roof

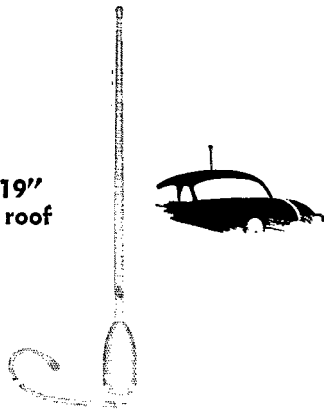

Shakespeare — **WONDEROD**

**Style 45 — for 440 — 480 mc
doubles your operating area**

Style 45 mobile high gain antenna gives more than 2.8 db gain over standard quarter wave antenna. Kit includes fiberglass antenna, rubber spring base, RG-58/U coaxial cable, input connector. Write for prices.

Shakespeare — **WONDEROD**

fiberglass whip antennas

Shorter resonant length. Light weight, excellent insulation. High flexural and impact strength. Won't corrode or take a set. $\frac{3}{8}$ " 24 thd. base fittings.

Standard Whips, 54"—60" — \$5.75
61"—90" — \$6.95

Base Extensions
18" — \$4.80 36" — \$5.82
27" (15 meter adaptor) — \$5.48
Amateur net

pat. applied for

COLUMBIA PRODUCTS CO.
Box 5207, Columbia, S. C.



—look for the spiral markings of
genuine Shakespeare Wonderods.

thank those who have been so consistent in their reporting of events and happenings in their areas. We still can use more information. This is YOUR Column and the best way to make sure it is kept interesting is to make certain that YOUR reporter is kept informed. Please address all correspondence to R.R. 3 or P.O. Box 1312, St. Stephen, N. B. Traffic: (June) VE1OM 13, PZ 13, AEB 11. (May) VE1FQ 56.

ONTARIO—SCM, Richard W. Roberts, VE3NG—This report, being written at the end of June, will find many of our members and readers very tired from participation in the Annual Field Day and the North Bay Hamfest. The two occurred the same week-end. ARRL FDs are on the fourth week end of June. EIL, ex-2XB, is back on the air after 7 years. His QTH now is Hamilton. Many old friends were at the Bay. Some of those seen were RW, KM, TX, RG, DEX, AMT, RH, EAW, AQB, DVO, DZA, DPO, GH, CJM, AWC, BYF, DKO, ASA, VZ, 2BE, ZHI, DTB, DQL, BOV, NG, BAX, etc. DVO is manager of the Muskeg Net. The Hamilton RC is hard at work on the ARRL Ontario Division Convention to be held Oct. 18. The Scarborough RC is conducting class instruction for would-be hams. The Nottown Club has instructed over 100 in a similar project over a period of twelve years with all passing the exam. The Sarnia C.D. was a FD competitor this year. Many others also were using e.d.-loaned equipment. Hot news: AEJ has a vertical antenna and worked a UC2KAK on 14 Mc. as his No. 1 contact. Also, it was on his first CQ. The Scarborough RC is running FB hidden transmitter hunts. Likewise, the Westside V.H.F. RC is running a summer contest for its members. This club has been in existence for twenty-one years. Is this the oldest club in Ontario? 3DFU worked PJ3AA, ARUBA. Much interest is being shown by Ontario Hams in boat mobile installations. Some of those already operating on Canadian Waters are as follows: TX, NG, AGA, DZA, DVO and DTO. Traffic: VE3DCX 170, BUR 110, NG 102, AUU 77, DPO 70, EHI 66, KM 66, DTB 61, ELU 50, NO 46, RH 35, AML 27, DZA 22, RW 10, CF 8, AVS 2.

QUEBEC—SCM, C. W. Skarstedt, VE2DR—Fall activities will be starting up again and it would be encouraging if more stations would take an active part in traffic nets. For e.w. try OSN/PQN, 3535 kc. at 1900. For phone: Quebec Phone Net, 3780 kc. at 1845. Many groups took part in Field Day activities but results were meager because of exceptionally poor conditions. BG enjoys talking to VKs and ZLs via s.s.b. EC renewed his ORS appointment. YF is Official Observer and is taking an active interest. ATQ now signs JZ. AGN is busy rebuilding his operating layout in the basement. APC is listening on 2 meters with a new eight-element Telrex Yagi. ANZ has joined the cubical quad boosters. A visit to AIO's QTH revealed an imposing antenna farm. Dipoles on 55-ft. towers are proving very effective on 20 meters. A new quad is being hoisted on top of one of the towers. QC and QII are active on 20 meters. AOV also favors 20 meters where he has been observed with a very acceptable signal. Traffic: VE2DR 68, EC 60, BG 25.

ALBERTA—SCM, Gordon W. Hollingshead, VE6VM—PAM: OD, NC, QE and NQ were active Field Day stations with 8, 5 and 13 operators, respectively, participating. Alberta representatives at the Arnprior C.D. Center June 23-27 were WT, MJ, ON and RE. EE, QS, PQ, ZL, SO, TF, VK, HG and WT conducted a series of amateur radio demonstrations at the mammoth Scout Jamboree July 7-10. PV reports the Lethbridge ham class wound up with 18 candidates sitting for the exam. Traffic: VE6VM 241, OD 8, PV 7.

SASKATCHEWAN—SCM, Lionel O'Byrne, VE5LU—TH was a recent visitor to W6-Land and is rebuilding the mobile for 75, 20 and 10 meters. HR and VT are mobile on 144 Mc. Saskatoon has 4 mobile and 3 home stations on 2 meters. LM has a 75A-4 receiver and 144 equipment. DU has a new 10-meter beam. K5LOQ was a recent visitor at HR's. We regret to include among Silent Keys 5GD, who passed away very suddenly, and 7FF, an ex-VE5. JK, BL and GI are on 144-Mc. phone with 20 watts to a 2E26, using a Collinear antenna. NA was seen in Regina and district. QL, our PAM, reports that activity on phone is low. Traffic: VE5LM 28, RE 12, DS 11, HF 4, QL 4.

Two-Band Halo

(Continued from page 12)

Tuning up at 145 Mc., for example, will give quite satisfactory operation from the low end to 146 Mc., the halo being much broader in frequency response when it is operated on its third
(Continued on page 148)



LEO I. MEYERSON,
W9GFQ

LEO SAYS:

More Low-Cost Power

from



with the Globe Chief 90A



\$615
per mo.

\$7.45 Down
or \$74.50 Cash

IN KIT FORM:


\$500
per mo.

\$6.00 Down
or \$59.95 Cash

Completely bandswitching, 90w CW Xmtr. for 10-160M. Compact, with well-filtered, built-in power supply. Pi-Net for 52-600 ohms. Modified grid-block keying for max. safety. Provisions for VFO input & operation, conversion to tone with Plate or Screen Modulator. Shielded, new Forward Look Cabinet. Kit contains all parts, tubes, instructions & pre-punched chassis.

Convert to Fone With the
Universal Modulator UM-1

W/T: \$4995




Kit (less tubes):
\$3250

Steel cover accessory:
\$3.00 extra.

Supplies 10-45w audio output depending on tube types. May be used as Class A or AB₂ modulator to modulate RF inputs 8-100w for as driver for higher power modulator. Output matching impedance from 500-20,000 ohms. Carbon or crystal mike may be used. Dual purpose 6X8 speech tube, 6F6, 6K6, 6V6, 6L6 or 5881 tubes may be used as modulators.


Or the Screen Modulator Kit SM-90
Printed Circuit Board

Permits radio-telephone operation at minimum cost. Self-contained. All connections from modulator to Xmtr. included, as well as latest design printed circuit board, all parts and complete instructions.



\$1195

Globe's VFO 6-2



For the 6 and 2M bands. Perfect zero beat with exclusive bandspeed control. Built-in, well-filtered power supply, including voltage regulation. Temperature compensated. Calibrate switch for zero-beating signal frequency with Xmtr. off. Approx. 50V RF output. Plugs into Xtal. socket of Xmtr. Also available. VFO 666 for 6M only, w/t: \$49.95.

Wired & Tested: \$5995

In Kit Form: \$4995



Send your Q-9

FREE CATALOG
and brochure
on complete
line of Globe
Electronics
Equipment.

NAME: _____

ADDRESS: _____

CITY & STATE: _____

harmonic. In our model the series capacitor in the gamma arm was at about the middle of its range for 50 Mc., and near minimum for 144 Mc. Slight differences in mechanical construction may change the value of capacitance required, so these settings should not be taken as important.

The closeup photograph shows a dodge we used to avoid carrying a spare insulating cone around in a pocket, running the chance that it would be missing when a band change was to be made. The head was cut from a 6-32 screw, leaving a threaded stud about 1/2 inch long. This is screwed into one of the ceramic cones. The other cone then serves as a nut, to tighten down the capacitor plate. In changing bands we then merely swap cones.

Results

Extensive tests have been run with the 2-band halo on both 6 and 2 meters. Several contacts over skip paths of 1000 miles or so have been made on 6, using less than 3 watts power output. Ground-wave coverage is considerably greater than is possible with a vertical whip. For those who may not be familiar with what can be done locally on 6, here is an example of typical coverage. Calling CQ upon leaving Coventry Lake, 20 miles east of Hartford, we raised W1FVV, in the capital city. The contact was maintained without loss of a word, through the 45 miles of hilly country driving, from Coventry to the home location of W1HDQ, nearly the same distance to the west of Hartford. Signal reports received average some 10 db. above those obtained with a vertical whip, but on receiving the effective margin is much greater than this, as a result of the far better signal-to-noise ratio obtained with horizontal polarization in mobile work.

On 144 Mc. an extra dividend accrues from the fact that our two-band halo is a larger antenna than even a horizontal dipole for 144 Mc. In some previous tests we had found that a half-wave dipole was appreciably better than a 144-Mc. halo. There was some directional effect from the dipole, but in mobile (actually in motion) work it did not seem particularly important. Much of the signal received in a 2-meter mobile setup is scattered from trees, buildings, hills and the like, so it seems to be coming from several directions at once. In stationary tests of the 2-band halo we oriented a dipole for best signal, and then switched to the new halo. An increase of several db. was reported in nearly every instance, and the two-band halo was at least the equal of the horizontal dipole every time. Either is way ahead of a vertical whip, in work with horizontally-polarized stations.

Strays

Proving the superiority of phone over c.w., K1EIT was able to get his pet alligator to give a short croak over the mike during a QSO with K1BAO.